

VL) with one half used the other half as the 1-f or the frequency are ex- find, but the oscilla or s. A vari- stic is. Another used as the speech an- output between stage- oxide amplifier in f- a use. The speaker an- pl- s. of the speaker an- pl- if.

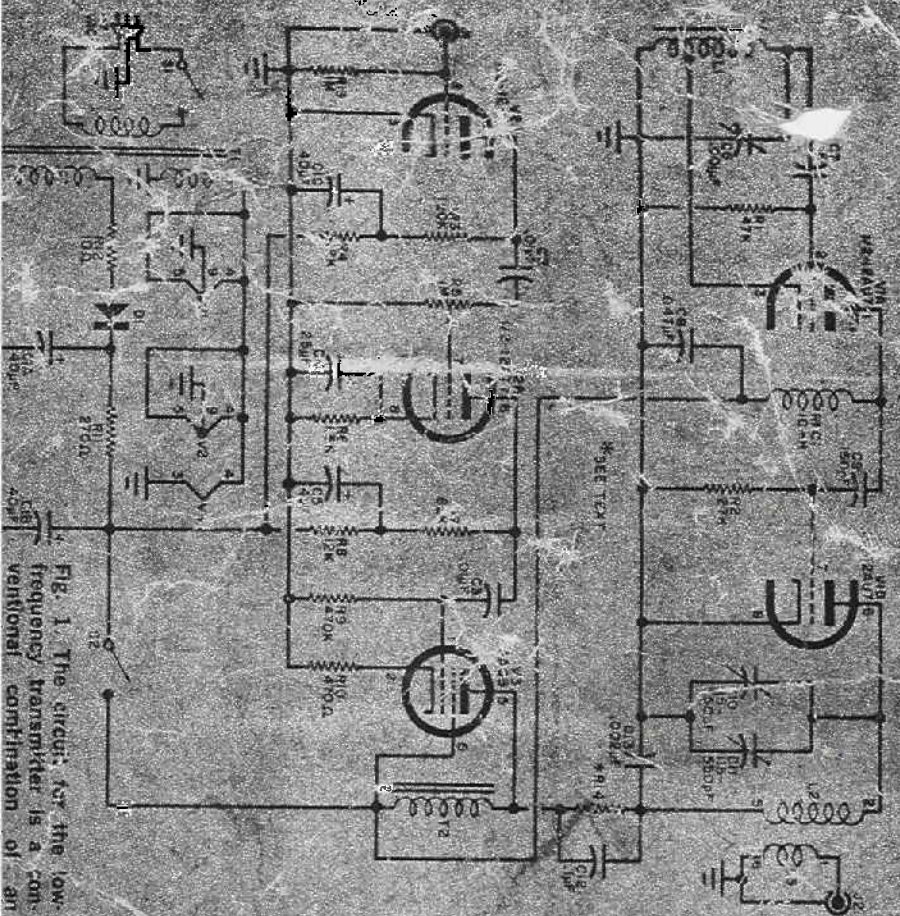


Fig. 1 The circuit for the low-frequency transmitter is a conventional combination of an

